
Digital Knight Power Socket Kit Instructions

Please replace ALL items included with this kit, regardless of which components have failed or you feel need to be replaced. Use the new wires included with the kit. You may need to use the existing wires in your press if smaller black and white wires are merged with the power wires (as in the case of automatic presses).

- 1. Snap out the old switch and inlet socket. You may need to break the tabs from the inside of the control panel to do this.
- 2. Snap in the new components. They can be pressed in by hand tightly. (For presses dating prior to 2004, the new on/off switch may be larger than the hole. File open the hole, or grind down the plastic body of the on/off switch so it fits tightly, all the way in.)
- 3. Connect the black and white wires. Please refer to the diagram below:

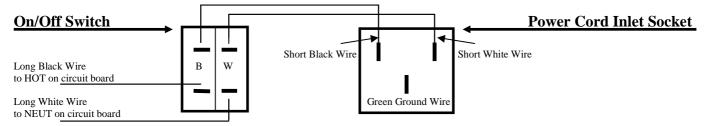

4. Make sure the power cord is plugged in to the wall, and into the power socket, and test the press.